


ORR EQUALIZER II SEAMED

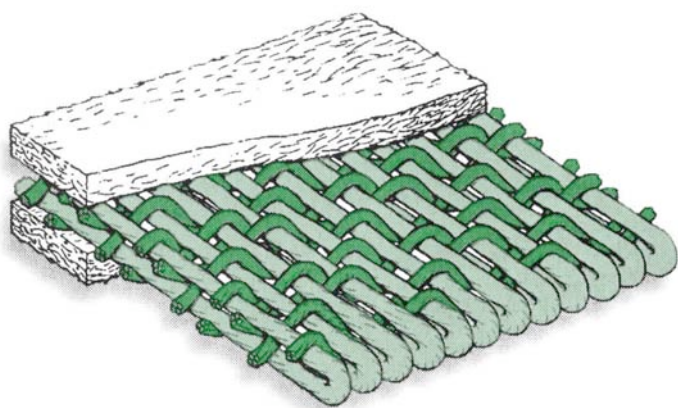

Ease of installation is only one of the many advantages of the Orr/Equalizer Seamed. Our method for producing the seaming loops yields consistent quality with proven mark-free performance.

The Equalizer Seamed is applicable to practically any machine producing white coated and uncoated fine paper, newsprint or coated board grades.


Design Options

| | |
|--------------------------|--|
| MD Yarns | Single Monofilament |
| CMD Yarns | Single Monofilament |
| Weights | 4.0 – 5.6 oz/sq.ft. 1460 – 1708 gsm |
| Base Construction | Double Layer |

Application

| | |
|------------------|--|
| Grades | Coated/Uncoated Fine/ Newsprint/Coated Board |
| Positions | Twinver Pickup, 2 nd Press Trinip Pickup, 1 st Bottom Straight Through Suctions, Plain and Blind Drilled Presses |

H²O Capacity Under Load

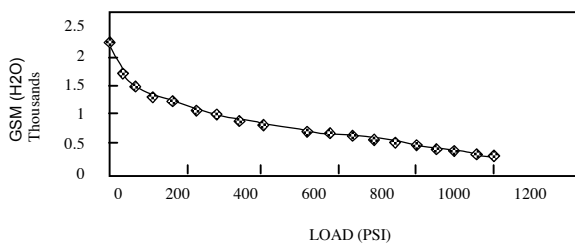

Recommended Minimum Uhle Box Vacuum

18 cfm/sq.in. at 2 –4 msec dwell