


ORR EQUATEX- II

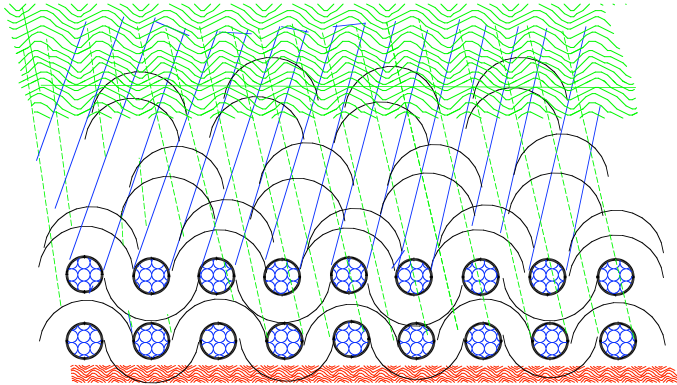

This construction consists of specially engineered base fabrics, to form a biaxial construction. The structure creates a better base both for water removal and resistance to compaction. This multilayer fabric provides the void capacity required for high impulse presses and other applications where large amounts of water are removed from the nip. The biaxial base cleans easier and stays open longer.


Design Options

MD Yarns	Single Monofilament Cabled Monofilament
CMD Yarns	Single Monofilament or Cabled Monofilament
Weights	4.6 – 5.8 oz/sq.ft. 1400 – 1770 gsm
Base Construction	Double Layer

Application

Grades	Fine Paper, Coated Grades, Specialty, Newsprint
Positions	ENP, LNP, Trinip, Binip Pickup, High Loaded 1 st Presses

H²O Capacity Under Load

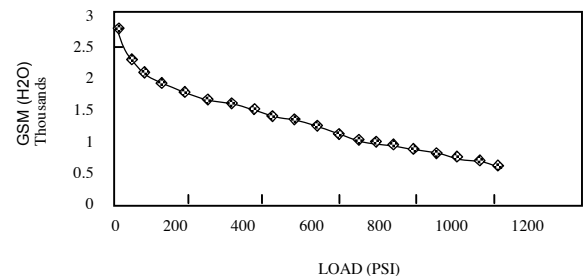

Recommended Minimum Uhle Box Vacuum

20 cfm/sq.in. at 2 – 4 msec dwell