


# ORR EquaSmooth II L

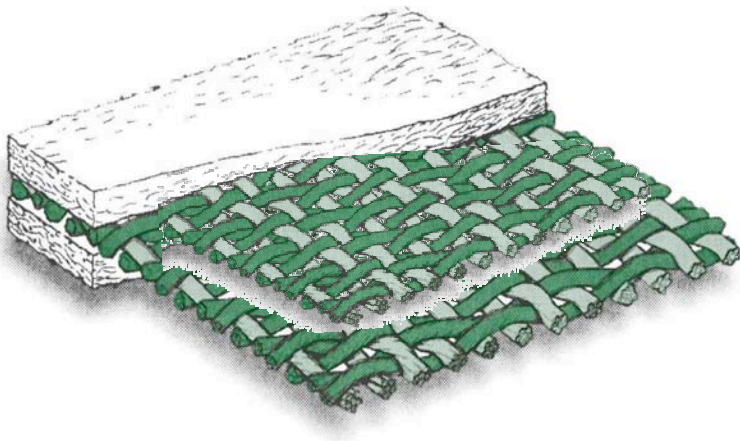

*This laminated fine layered woven base construction is ideal for positions where finish is very important and takes precedence over drainage and water removal. Its extra fine surface is great where paper and board applications require high quality printing surfaces.*


## Design Options

<b>MD Yarns</b>	Cabled Monofilament or Single Monofilament
<b>CMD Yarns</b>	Single Monofilament or Cabled Monofilament
<b>Weights</b>	3.3 – 4.5 oz/sq.ft. 1007 – 1373 gsm
<b>Base Construction</b>	Laminated Layers

## Application

<b>Grades</b>	Very fine finish paper and board
<b>Positions</b>	Suction, Ventanip or Blind Drilled Presses

## H<sup>2</sup>O Capacity Under Load

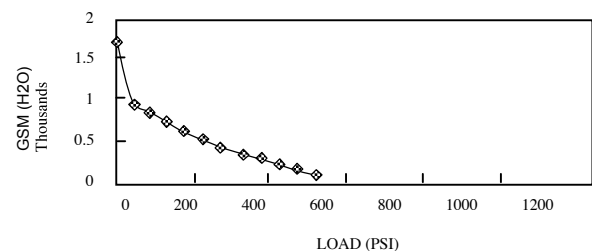

## Recommended Minimum Uhle Box Vacuum

12 cfm/sq.in. at 2 – 4 msec dwell