


ORR MAXIMIZER B- I

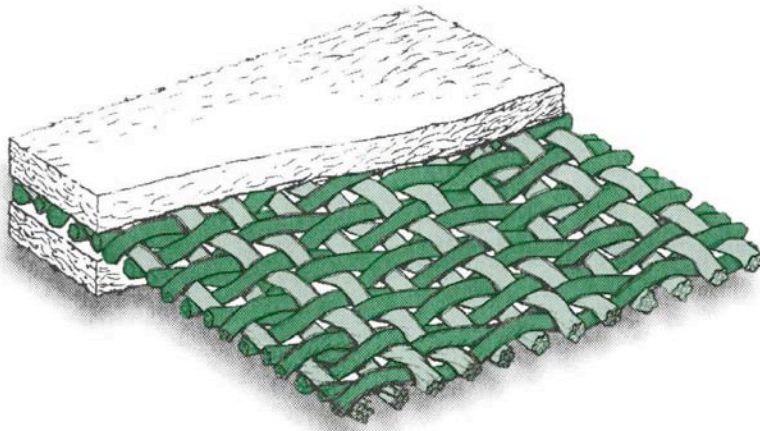

This single layer weave features a coarse woven pattern for low contact surface to prevent sheet stealing. It is ideal for applications with marginal conditioning systems that rely upon nip dewatering.


Design Options

MD Yarns	Cabled Monofilament Plied Multifilament
CMD Yarns	Cabled Monofilament Single Monofilament
Weights	2.8 – 3.6 oz/sq.ft. 854 – 1098 gsm
Base Construction	Single Layer

Application

Grades	Tissue/Toweling/Creping/ Wadding
Positions	Yankee Bottom Felt

H²O Capacity Under Load

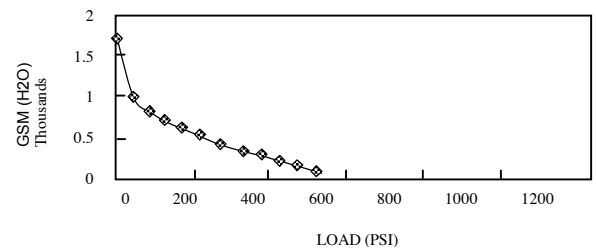

Recommended Minimum Uhle Box Vacuum

12 cfm/sq.in. at 2 – 4 msec dwell