


# ORR MAXIMIZER B-II

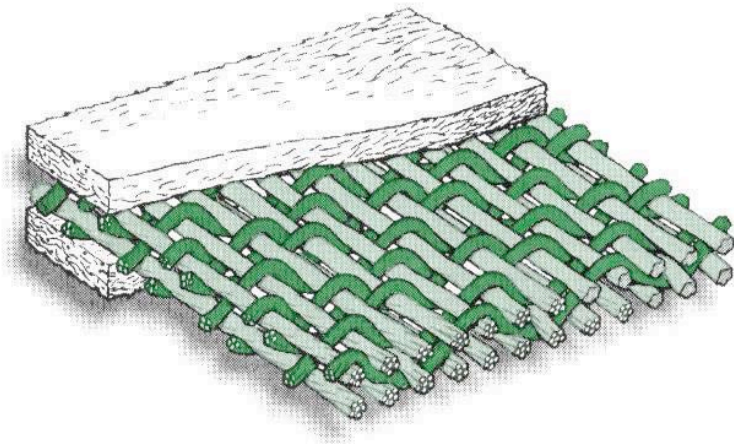

*The coarse surface of this double layer fabric enhances sheet release after the first press. On machines with sufficient conditioning systems, this design provides additional water handling capacity. It is ideal for applications where both nip and uhle box dewatering are important.*


## Design Options

<b>MD Yarns</b>	Cabled Monofilament or Plied Multifilament
<b>CMD Yarns</b>	Cabled Monofilament or Single Monofilament
<b>Weights</b>	2.8 – 4.0 oz/sq.ft. 854 – 1220 gsm
<b>Base Construction</b>	Double Layer

## Application

<b>Grades</b>	Tissue/Toweling/Creping/Wadding
<b>Positions</b>	Yankee Bottom Felt

## H<sup>2</sup>O Capacity Under Load

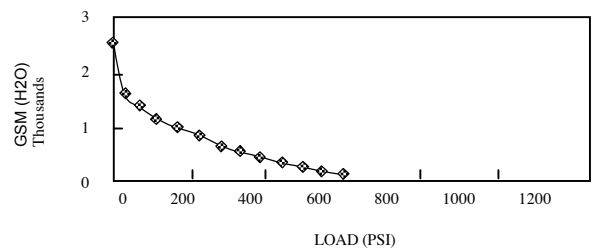

## Recommended Minimum Uhle Box Vacuum

15 cfm/sq.in. at 2 –4 msec dwell