

ORR MAXIMIZER YP- I


Design Options

MD Yarns	Cabled Monofilament or Plied Multifilament
CMD Yarns	Cabled Monofilament
Weights	3.1 – 4.5 oz/sq.ft. 945 – 1370 gsm
Base Construction	Single Layer

Application


Grades	Tissue/Toweling/Creeping/ Wadding
Positions	Yankee Pickup

H²O Capacity Under Load

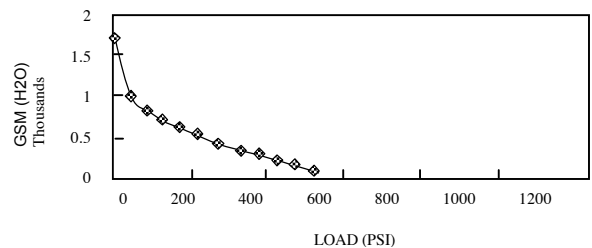

Recommended Minimum Uhle Box Vacuum

12 cfm/sq.in. at 2 – 4 msec dwell

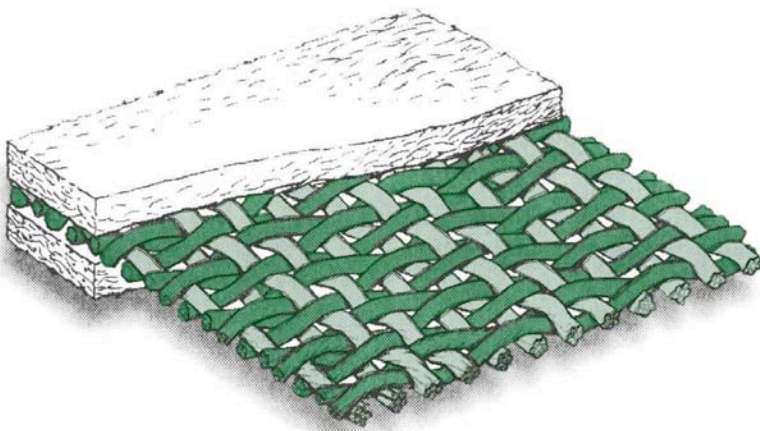

The single layer construction and high yarn density of this design creates a uniform, flat surface, which increases the felt to sheet contact. This characteristic enhances sheet transfer from the wire to the Yankee and improves pressure uniformity at the pressure rolls. Double felted machines or machines with limited uhle box vacuum are ideal applications for this product.