


ORR PULPMASTER III

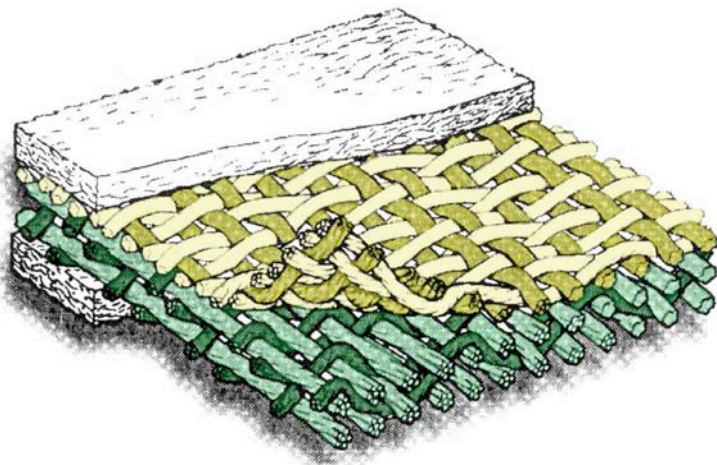

This construction consists of two individually woven base fabrics, which are laminated. The function of the top fabric is to allow lateral movement of water through the felt and impart an impression in the sheet that creates more surface area for better drying in the flakt dryer. The multilayer bottom fabric provides the void capacity required for pulp machine applications where large amounts of water are removed from the nip. The high base to batt ratio provides excellent resistance to filling.


Design Options

MD Yarns	Single Monofilament Single Monofilament Treated Plied Multifilament
CMD Yarns	Single Monofilament or Cabled Monofilament
Weights	5.0 – 6.8 oz/sq.ft. 1525 – 2067 gsm
Base Construction	Triple Layer Laminated

Application

Grades	Pulp Machines/ Flakt Dryers
Positions	Pickup, High Loaded 1 st Presses

H²O Capacity Under Load

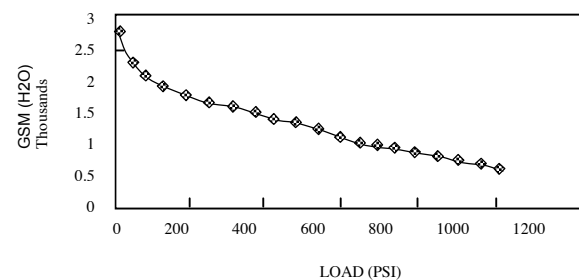

Recommended Minimum Uhle Box Vacuum

20 cfm/sq.in. at 2 – 4 msec dwell