


# ORR TURBO-LINER II

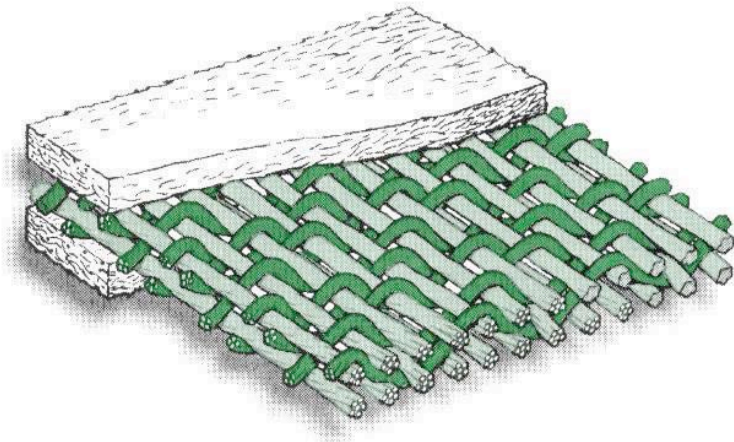

The double layer base construction of this design provides extra void capacity for improved uhle box dewatering, while maintaining good nip dewatering characteristics. The higher base:batt ratio also provides additional resistance to compaction and filling. Yarn selection is dependent upon finish, permeability and pliability requirements.


## Design Options

<b>MD Yarns</b>	Cabled Monofilament or Plied Multifilament
<b>CMD Yarns</b>	Single Monofilament or Cabled Monofilament
<b>Weights</b>	3.2 – 4.5 oz/sq.ft. 976 – 1373 gsm
<b>Base Construction</b>	Double Layer

## Application

<b>Grades</b>	Linerboard/Bag/Medium/ Cylinder Board/Pulp
<b>Positions</b>	Suction, Ventanip or Blind Drilled Presses

## H<sup>2</sup>O Capacity Under Load

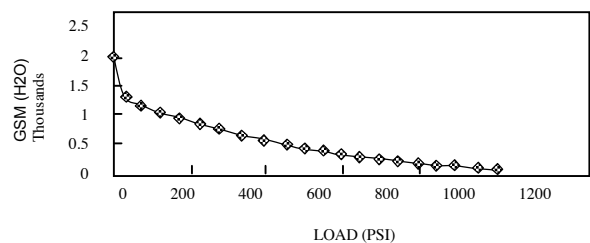

## Recommended Minimum Uhle Box Vacuum

15 cfm/sq.in. at 2–4 msec dwell