


# ORR TURBO-LINER III

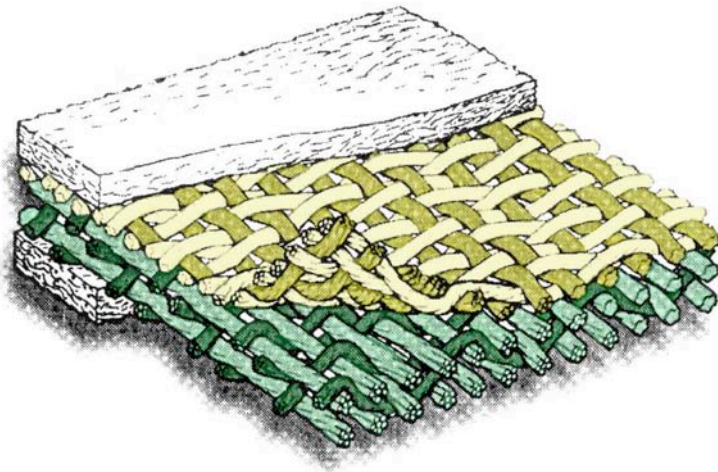

*This construction consists of two individually woven base fabrics, which are laminated. The function of the top fabric is to create a masking or diffusion effect. The multilayer bottom fabric provides the void capacity required for high impulse presses or applications (such as pulp machines) where large amounts of water are removed from the nip. The high base to batt ratio provides excellent resistance to filling.*


## Design Options

<b>MD Yarns</b>	Single Monofilament Cabled Monofilament Plied Multifilament
<b>CMD Yarns</b>	Single Monofilament or Cabled Monofilament
<b>Weights</b>	4.6 – 6.8 oz/sq.ft. 1400 – 2067 gsm
<b>Base Construction</b>	Triple Layer Laminated

## Application

<b>Grades</b>	Linerboard/Bag/Medium/ Cylinder Board/Pulp
<b>Positions</b>	ENP, LNP, Trinip, Binip Pickup, High Loaded 1 <sup>st</sup> Presses

## H<sup>2</sup>O Capacity Under Load

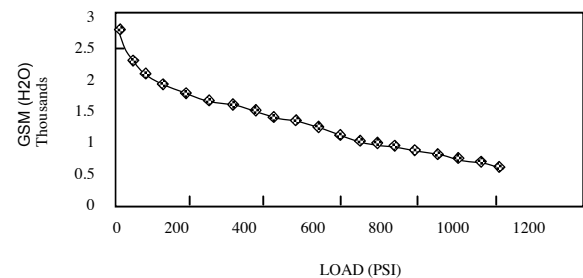

## Recommended Minimum Uhle Box Vacuum

20 cfm/sq.in. at 2 – 4 msec dwell