


ORR TURBO-LINER II-L

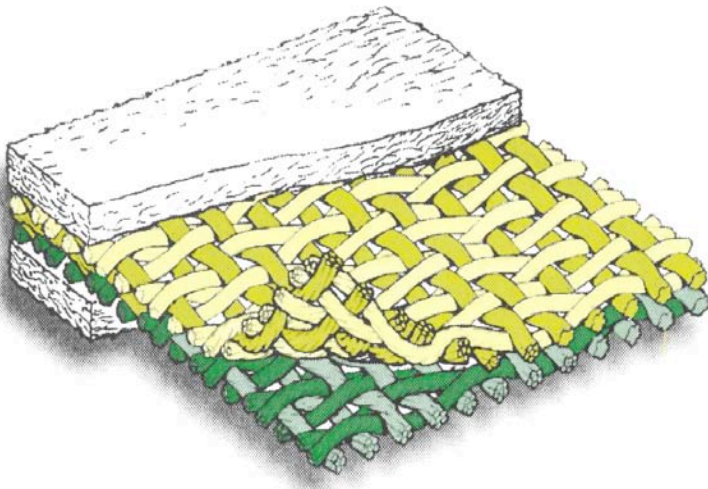

The Turbo-Liner II-L consists of two independently woven laminated base fabrics, with the top fabric being a fine masking fabric. Having a higher base to batt ratio than standard double layers, this design provides outstanding performance on positions where finish, shadow marking or press vibration are major concerns. Its dewatering capability is more uhle box dependent than standard double layers. Compaction resistance and void capacity are also higher than standard double layers.


Design Options

MD Yarns	Single Monofilament or Cabled Monofilament Plied Multifilament
CMD Yarns	Cabled Monofilament
Weights	4.2 – 5.4 oz/sq.ft. 1281 – 1647 gsm
Base Construction	Double Layer Laminated

Application

Grades	Linerboard/Bag/Medium/ Cylinder Board/Pulp
Positions	Suction, Ventanip or Blind Drilled Presses

H²O Capacity Under Load

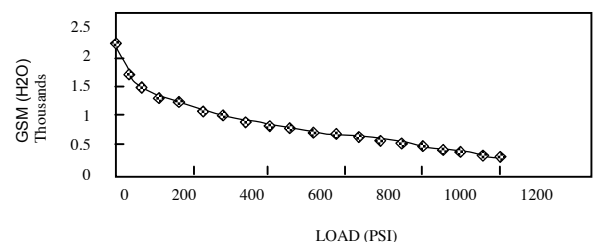

Recommended Minimum Uhle Box Vacuum

18 cfm/sq.in. at 2–4 msec dwell