


# ORR TURBO-LINER II SEAMED

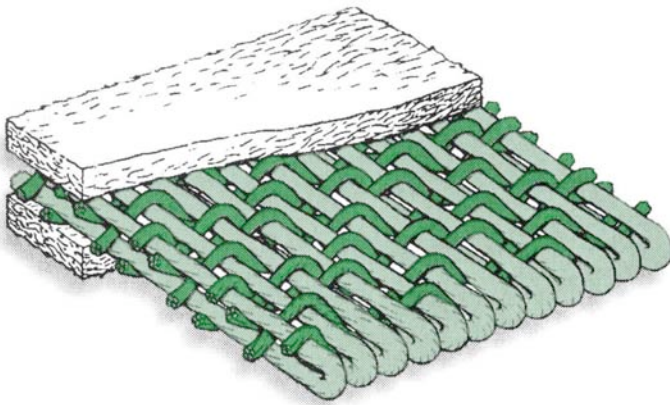

*In addition to ease of installation, the rigid single monofilament construction of the Turbo-Liner II Seamed provides superior resistance to compaction and filling. A significant improvement in water handling capability over standard double layer endless felts is realized with this design*

*Dimensional stability is enhanced by the use of a specifically engineered nylon polymer in the CMD. Width is not affected by even the highest temperatures encountered in the press section.*


## Design Options

<b>MD Yarns</b>	Single Monofilament
<b>CMD Yarns</b>	Single Monofilament
<b>Weights</b>	4.0 – 5.8 oz/sq.ft. 1220 – 1769 gsm
<b>Base Construction</b>	Double Layer

## Application

<b>Grades</b>	Linerboard/Bag/Medium Cylinder Board/Pulp
<b>Positions</b>	Plain, Suction, Ventanip or Blind Drilled Presses

## H<sup>2</sup>O Capacity Under Load

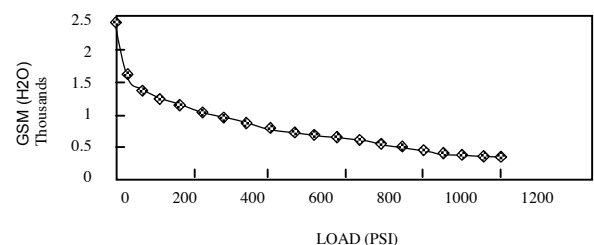

## Recommended Minimum Uhle Box Vacuum

18 cfm/sq.in. at 2 –4 msec dwell