


ORR TURBO-LINER III SEAMED

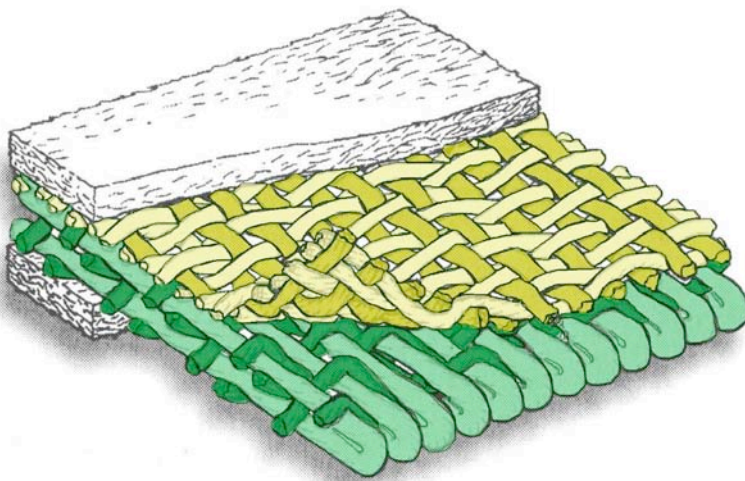

This triple base seamed design is constructed from two individually woven base fabrics, which are laminated. The high void capacity available in this style provides superior water removal in even the most demanding high loaded press positions.

This design is also capable of producing excellent finish in critical grades when constructed with a fine top masking fabric.


Design Options

MD Yarns	Single Monofilament or Cabled Monofilament
CMD Yarns	Single Monofilament
Weights	4.5 – 6.2 oz/sq.ft. 1370 – 1890 gsm
Base Construction	Triple Layer Laminated

Application

Grades	Linerboard/Bag/Medium/ Cylinder Board/Pulp
Positions	LNP, Tandem Presses, >1000 pli Presses

H²O Capacity Under Load

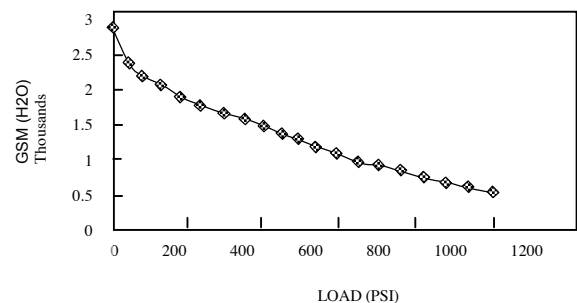

Recommended Minimum Uhle Box Vacuum

20 cfm/sq.in. at 2 – 4 msec dwell