


ORR TURBOLUX III

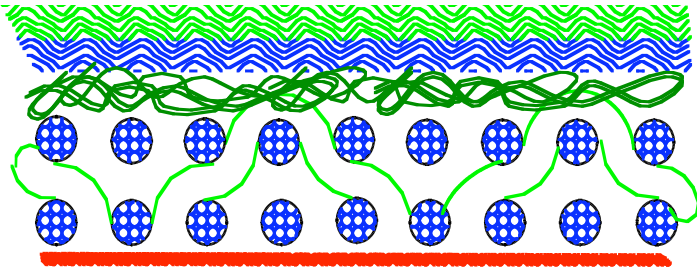

This construction consists of a double layer woven base fabric, with a third RANDOM FABRIC LAYER. The function of the top fabric is to create a non-marking layer which provides both added bulk plus masking or diffusion effect. The multilayer bottom fabric provides the void capacity required for high impulse presses or applications (such as board and pulp machines) where large amounts of water are removed from the nip. The high base to batt ratio provides excellent resistance to filling.


Design Options

MD Yarns	Single Monofilament Cabled Monofilament Plied Multifilament
CMD Yarns	Single Monofilament or Cabled Monofilament
Weights	4.6 – 6.8 oz/sq.ft. 1400 – 2067 gsm
Base Construction	Triple Layer Laminated

Application

Grades	Linerboard/Bag/Medium/ Cylinder Board/Pulp
Positions	ENP, LNP, Trinip, Binip Pickup, High Loaded 1 st Presses

H²O Capacity Under Load

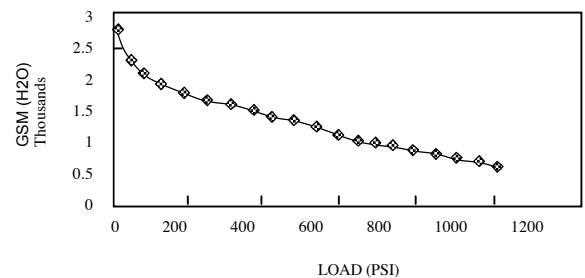

Recommended Minimum Uhle Box Vacuum

20 cfm/sq.in. at 2 – 4 msec dwell